RANGEMASTER SYSTEMS

PRODUCTS & SOLUTIONS

2014

CLAY TARGET SHOOTING
RIFLE RANGES

MAXIMA WARENHANDELSGMBH
"RANGEMASTER SYSTEMS"
8082 WEISSENBACH 51
AUSTRIA/EUROPE

PHONE: +43-699-104-03-204
FAX: +43-720-920-195
MAIL: sales@rangemaster.at
WEB: www.rangemaster.at

RANGEMASTER SYSTEMS - SORTIMENT 2014

RANGEMASTERSYSTEMS

» SEQUENCERS FOR CLAY TARGET SHOOTING:

Phono Pull Unit - Multi-Use	Page 1
"X1" Phono Pull unit, multi use, with integerated chipcard payment system	Page 1
"X2" sequencer, next generation fully featured sequencer, 80 modes, Video Interface, Chipcard reader	Page 1
"Thunder 2013" sequencer: Fully featured sequencer, 80 modes supported, including ISSF Rules 2013	Page 2
"X3 Flash" - most advanced sequencer with touch screen unser interface	Page 3
"X3 PRO/.NET" - full range automation based on X3 Flash	Page 4

» PUBLIC INFO SCREENS - REAL TIME RESULTS + CLASSIFICATION:

Rangemaster Rangeview Monitors	Page 5
Rangemaster Classification Monitors	Page 5

» SCOREBOARDS / CLAY TARGET SHOOTING:

Scoreboard 80mm digit height, 25/50 points, total, small matrix	SCTINY	Page 6
Scoreboard 100mm digit height, 4 digits, 25/50 points-small matrix	SCMINI	Page 6
Scoreboard 100mm digit height, 4 digits, 25/50 points, red/green digits/points-small matrix	SCMINE	Page 6
Scoreboard 100mm digit height, 6 lines, 8 alpha+total+ red 25/50 points- mixed matrix	SCMIDI	Page 7
Scoreboard 100mm digit height, 6 lines, 8 alpha+total+red/green 25/50points-mixed matrix	SCMIDE	Page 7
Scoreboard 100mm digit height, 8 lines, 64 rows, 25/50 points, red digits/points, large matrix	SCMEGA	Page 7
Scoreboard 100mm digit height, 8 lines 64 rows, 25/50 points, red/green digits/points, l.mat.	SCMEGE	Page 8

» REMOTE CONTROLS- TRANSMITTERS-433MHZ / CLAY TARGET SHOOTING:

8 Channel digital remote control (transmitter) "ECO-SERIES"	TXECO	Page 9
3 Channel digital remote control (transmitter), Skeet layout, "PRO-SERIES"	TXPRO3	Page 9
4 Channel digital remote control (transmitter) "PRO-SERIES"	TXPRO4	Page 9
8 Channel digital remote control (transmitter) "PRO-SERIES"	TXPRO8	Page 10
8 Channel digital remote control (transmitter) "ULTIMATE-SERIES"	TXULT8	Page 10
8 Channel Sporting Commander with Chipcard payment incl. Chipcard reader, LCD	TXSPO8	Page 10
24 Channel transmitter for Rangemaster X3 Pro/.Net EVO	TX24K	Page 11

» REMOTE CONTROLS- RECEIVERS-433MHZ / CLAY TARGET SHOOTING:

1 out of 8 sporting receiver, boxed - IP65 enclosure, antenna, 12VAC/DC - 220VAC	RXIQ1*	Page 12
3 Channel Receiver for Skeet, IP65 enclosure, antenna	RXIQ2	Page 12
3 Channel Receiver for Skeet, IP 65 enclosure, antenna, drives 2 traps, 2 lights, timer	RXIQ4S	Page 12
4 Channel Receiver - IP 65 enclosure, antenna	RXIQ4	Page 13
8 Channel Receiver, IP 65 enclosure, antenna,	RXIQ8	Page 13
24 Channel receiver for Rangemaster X3 Pro/.Net EVO	RX24K	Page 13

PLEASE NOTE: ALL PRODUCTS AND INFORMATION HEREIN ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTIFICATION

RANGEMASTERSYSTEMS

» RELEASE BOXES / FEEDING UNITS / CLAY TARGET SHOOTING:

Release box for Skeet, H.D. relay contact or 24V solenoid power supply, 2 relays for lights	RL01	Page 14
Release box for 5 traps, H.D. relay contact or 24V solenoid power supply	RL02	Page 14
Release box for 15 traps, H.D. 15 switched relay contacts OR 24V solenoid power supply	RL03	Page 14
Release box for 15 traps, heavy duty Mosfets, 24V solenoid power supply	RL04	Page 15
Combined Release box for 17 Traps and 2 relays for skeet lights	RL06	Page 15

» MICROPHONES & STANDS / CLAY TARGET SHOOTING:

Highly sensitie Microphone, without light/lamp, 1,5m cable	MIC0	Page 16
Highly sensitive Microphone with light and extra heavy duty stand/Tripod, connectors	MIC1	Page 16
Highly sensitive Microphone with light, connectors, without stand/tripod	MIC2	Page 16
Extra heavy duty stand/tripod for MIC 02	MIC3	Page 17
Heavy duty stand for MIC02, fixed	MIC4	Page 17

» CHIPCARD, ACCESS CONTROL & COINER ITEMS / CLAY TARGET SHOOTING + RIFLE RANGES:

Chipcard Payment System and Interface box for Skeet/Trap FA/ATA/Double Trap	CCDE	Page 18
Chipcard Payment System and Interface Box to control up to 8 traps + general enable	ELITEPS	Page 18
Coiner for Thunder/X2 sequencers, incl. Connector and 100 coins/tokens	COINA	Page 18
Coiner with LCD display, targets adjustable per coin/token, with relay, 100 coins	COINE	Page 19
Chipcard reader, stand alone, time based for rifle ranges	CCR03	Page 19
Chipcard reader, time based for rifle ranges, with interface for X3 Pro/.Net	CCR01	Page 19
Central command module for CCR01/rifle ranges	CCCN	Page 20
Door opener with Chipcard reader, stand alone	DOSA	Page 20
Door opener with Chipcard reader for X3 Pro/.Net, with Interface	DORS	Page 20
Chipcards for Rangemaster X3 Pro/.net System	CC	Page 20
Chipcards for Rangemaster Thunder, X2, CCDE, ELITEPS,	CCSEC	Page 21
Chipcard loading software + USB Chipcard reader/writer	CCS	Page 21
Automatic Chipcard loader with Money acceptor	CCL	Page 21
Chipcard loader, handheld terminal, with lcd display and "Range Protect"	CCC	Page 22

» COMPETITION SOFTWARE / CLAY TARGET SHOOTING:

Rangemaster EasyScore - Stand alone competition software for ISSF- and FITASC shooting	Page 23
Rangemaster EasyScore .NET - Lan-Based competition software with result presentation on monitors	Page 23
Rangemaster X3 PRO/NET - full range automation with advanced competition support	Page 24

» SOLUTIONS FOR RIFLE RANGES:

25m pistol lane motor controls	YCP	Page 25
100m rifle lane motor controls	YCR	Page 25
Door opener with Chipcard reader, stand alone	DOSA	Page 25
Chipcard loader, handheld terminal,, with lcd display and "Range Protect"	CCC	Page 26
Chipcard reader, time based for rifle ranges, with interface for X3 Pro/.Net	CCR01	Page 26
Chipcard reader, stand alone, time based for rifle ranges	CCR03	Page 26
Door opener with Chipcard reader for X3 Pro/.Net, with Interface	DORS	Page 27

PLEASE NOTE: ALL PRODUCTS AND INFORMATION HEREIN ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTIFICATION

RANGEMASTER SYSTEMS
SEQUENCERS

» PPMU - MULTI USE PHONO PULL UNIT

TECHNICAL DATA:
- SUITABLE FOR ANY TYPE OF ELECTRICALLY OPERATED TRAPS
- 5 MICROPHONES CONNECTABLE
- BUILT IN DISPLAY
- ADJUSTABLE SENSITIVITY
- ADJUSTABLE TIMER
- RESETABLE COUNTER
- HIGHLY IMMUNE AGAINST BACKGROUND NOISE

ORDER CODE: PPMU

» X1 - MULTI USE PHONO PULL UNIT WITH CHIPCARD READER

TECHNICAL DATA:
- SUITABLE FOR ANY TYPE OF ELECTRICALLY OPERATED TRAPS
- 5 MICROPHONES CONNECTABLE
- BUILT IN DISPLAY
- ADJUSTABLE SENSITIVITY
- ADJUSTABLE TIMER
- RESETABLE COUNTER
- HIGHLY IMUNE AGAINST BACKGROUND NOISE
- CHIPCARD READER BUILT IN

ORDER CODE: X1

» X2 SEQUENCER 2014

TECHNICAL DATA:
- BUDGET PRICED, FULLY FEATURED STATE-OF-THE-ART SEQUENCER
- EASY-TO-USE INTERFACE WITH LCD-DISPLAY (LANGUAGE VERSIONS: ENG/GER) WITH ADJUSTABLE SMART MENU
- CHIPCARD READER BUILT IN
- REAL RANDOM SEQUENCES FOR TRAP FO/FU AND DT 2013 ACCORDING TO ISSF AND FITASC REGULATIONS
- 80 DISCIPLINES NOW SUPPORTED INCLUDING ALL ISSF RULE CHANGES PER 01.01.2013
- TIMER FOR SKEET
- 100% ISSF AND FITASC COMPLIANCE
- COUNTER (RESETABLE) FOR TARGETS THROWN
- ADUSTABLE-, INSTANT RELEASE PHONO PULL UNIT
- ACTIVITY LIGHTS ON MICROPHONES SUPPORTED
- NO-BIRD CONTROL IN PAYMENT MODES
- BUILT IN COLOUR-VIDEO INTERFACE FOR STANDARD VGA-MONITORS/LCD/PLASMA (FOR SKEET/TRAP)
- BUILT IN 8 CHANNEL WIRELESS REMOTE CONTROL
- JUNCTION BOX FOR 23 TRAPS, 2 SKEET LIGHTS AND 1 ZERO TONE BUZZER OPTIONAL
- WIRELESS 8 CHANNEL TRANSMITTER/RECEIVER OPTIONAL
- 110-240VAC, 50-60HZ POWER INPUT (OTHERS UPON REQUEST)
- AUTO-CONTINUE OF ROUNDS ABORTED DUE TO POWER LOSS

ORDER CODE: X2

» THUNDER 2013

FEATURES:

- BUDGET PRICED, FULLY FEATURED STATE-OF-THE-ART SEQUENCER
- EASY-TO-USE INTERFACE WITH LCD-DISPLAY (LANGUAGE VERSIONS: ENG/GER) WITH ADJUSTABLE SMART MENU
- CHIPCARD READER BUILT IN
- REAL RANDOM SEQUENCES FOR TRAP FO/FU AND DT 2013 ACCORDING TO ISSF AND FITASC REGULATIONS
- 80 DISCIPLINES NOW SUPPORTED INCLUDING ALL ISSF RULE CHANGES PER 01.01.2013
- TIMER FOR SKEET
- 100% ISSF AND FITASC COMPLIANCE
- COUNTER (RESETABLE) FOR TARGETS THROWN
- ADUSTABLE-, INSTANT RELEASE PHONO PULL UNIT
- ACTIVITY LIGHTS ON MICROPHONES SUPPORTED
- NO-BIRD CONTROL IN PAYMENT MODES
- NO SWITCHING AND CABLE PULLING WHEN CHANGING BETWEEN TRAP/DT/SKEET/COMPAK (8+5 MICROS DIRECTLY CONNECTABLE)
- OPTIONAL COLOUR-VIDEO INTERFACE FOR STANDARD VGA-MONITORS/LCD/PLASMA (FOR SKEET/TRAP)
- BUILT IN 8 CHANNEL WIRELESS REMOTE CONTROL
- JUNCTION BOX FOR 23 TRAPS, 2 SKEET LIGHTS AND 1 ZERO TONE BUZZER INCLUDED
- CONNECTS UP TO 13 MICROPHONES SIMULTANOUSLY
- WIRELESS 8 CHANNEL TRANSMITTER/RECEIVER INCLUDED
- 110-240VAC, 50-60HZ POWER INPUT (OTHERS UPON REQUEST)
- AUTO-CONTINUE OF ROUNDS ABORTED DUE TO POWER LOSS

ORDER CODE: TH

» RANGEMASTER X3 FLASH

FEATURES:

- MOST ADVANCED - STATE-OF-THE-ART SEQUENCER
- EASY-TO-USE INTERFACE WITH LARGE 15" TFT TOUCH SCREEN (LANGUAGE VERSIONS: ENG/GER/ITA/FRA/HU/ESP/POR/RUS)
- REAL RANDOM SEQUENCES FOR TRAP FO/FU ACCORDING TO ISSF AND FITASC REGULATIONS
- TIMER (ON/OFF) FOR SKEET AND DOUBLE TRAP
- 100% ISSF AND FITASC COMPLIANCY
- COUNTER FOR ALL TRAPS WITH NO-BIRD-CONTROL (RESETABLE) FOR TARGETS THROWN AND TOTAL TARGET COUNTER
- BUILT IN SCORING SOLUTION
- ADJUSTABLE ZERO TONES
- INSTANT RELEASE PHONO PULL UNIT
- ACTIVITY LIGHTS ON MICROPHONES SUPPORTED
- NO-BIRD CONTROL PER SHOOTER IN PAYMENT MODES
- RS485 INTERFACE FOR EASY CONNECTION WITH RANGEMASTER SCOREBOARDS
- BUILT IN WIRELESS RECEIVER (433MHZ) AND INCLUDING EXTERNAL ANTENNA
- INCLUDED: WIRELESS TRANSMITTER TXECO (433MHZ)
- NO SWITCHING AND CABLE PULLING WHEN CHANGING BETWEEN TRAP AND SKEET (8+5+4 MICROS DIRECTLY CONNECTABLE)
- AUTO-CONTINUE OF ROUNDS ABORTED DUE TO POWER LOSS
- UPGRADEABLE TO RANGEMASTER X3 PRO/.NET COMPLETE RANGE MANAGEMENT

ORDER CODE: X3F

» RANGEMASTER X3 PRO/.NET

FEATURES:

- COMPLETE SHOOTER`S DATABASE
- COMPLETE DYNAMIC PRICING SOLUTION
- CHIPCARD PAYMENT WITH ACCOUNTING FOR EACH SHOOTER
- INTEGRATED / ADVANCED COMPETITION SOFTWARE WITH ALL NECESSARY FEATURES
- FULL ACCOUNTING FOR THE SHOOTING RANGE WITH ALL NECESSARY REPORTING FEATURES
- MOST ADVANCED SEQUENCERS (X3FLASH) WITH MOST MODERN SYSTEM FEATURES
- REAL TIME INTERNET COMPETITION SUPPORT
- REAL TIME SHOOTER/SPECTATOR MONITORS AND LARGE - IN FIELD SCOREBOARDS
- REAL TIME SCORING FOR CURRENT ROUNDS IN FIELD AND IN CLUB HOUSES AND ON INTERNET
- REAL TIME RESULT LISTS FOR INDIVIDUALS AND TEAMS
- ACCESS CONTROL WITH CHIPCARD TO RESTRICTED AREAS/RIFLE RANGES OR DOOR OPENERS
- COMPLETE TRAP CHARGE CONTROL WITH COUNTERS / NO BIRD COUNTERS AND CURRENT FILL STATUS
- ONE CHIPCARD PER SHOOTER, CREDIT AVAILABLE FOR ANY TYPE OF CLAY TARGET OR RIFLE SHOOTING
- CHIPCARD LOSS PROTECTION
- ADVANCED TRAINING SYSTEM WITH TIMETAKING/FULL STATISTICAL OUTPUT/FREE TRAINING/D-MINING
- STATUS OF SHOOTING RANGE ALWAYS ONLINE
- MINIMUM STAFF NECESSARY FOR LARGE SHOOTING RANGES
- POSSIBLE PAYMENT MODES (SELECTABLE FOR EACH SHOOTER): PRE-, POST- & FREE OF CHARGE
- MULTI LANGUAGE SUPPORT FOR SHOOTERS INTERFACE:GER/ENG/ITA/ESP/POR/CZ/HU/RUS
- ANY TYPE OF CLAY TARGET SHOOTING INCLUDING HELICES SUPPORTED
- RANGE INTERCOMM / VOIP-TELEPHONY FROM OFFICE TO SHOOTING RANGES

ORDER CODE: X3P

» RANGEMASTER REAL TIME RANGEVIEW PRESENTATION

- AUTOMATICALLY COLLECTS ALL NECESSARY DATA ON A SHOT PER SHOT BASIS
- SHOWS ALL RELEVANT DATA INCLUDING NAME, NOC, TOTAL AND RANK IN FINALS
- SHOWS CURREMT ACTIVE SQUADS AND NEXT SQUADS TO SHOOT ON THIS RANGE
- CAN BE ADJUSTED TO DISPLAY ALSO LIVE RESULT LISTS

» RANGEMASTER REAL TIME RESULT PRESENTATION

- AUTOAMTICALLY COLLECTS ALL NECESSARY DATA
- ADJUSTABLE PRESENTATION - LANDSCAPE AND PORTRAIT
- ADJUSTABLE RESOLUTION (800X600 UP TO 1920X1080 PIXEL)
- SHOWS ALL RELEVANT DATA
- CAN BE ADJUSTED TO DISPLAY LIVE SHOOTING PROGRESS ALSO (RANGEMASTER RANGEVIEW)

» SCTINY-SCOREBOARD

TECHNICAL DATA:

- 6 LINES WITH A 6X25/50 GRID TO DISPLAY SHOOTING PROGRESS AND HITS/LOSTS
- BOARD SIZE: 1400X1200MM
- 80MM DIGIT HEIGHT WITH 7X5 DOT MATRIX RESOLUTION FOR DIGITS
- FULLY DAYLIGHT CAPABLE
- DIRECTLY CONNECTS TO RANGEMASTER SEQUENCERS
- GOOD FOR ALL TYPES OF ENVIROMENTS/TEMPERATURES/LIGHT CONDITIONS
- PRICE MENTIONED BELOW EXCLUDING STANDS/PYLONS BUT WITH DATA CABLE.
- INPUT VOLTAGE: 80..240 VOLT AC
- TYPICAL POWER CONSUMPTION AT 220VAC: 70 WATTS
- OPTIONAL LINE WITH TIMETAKING INDICATORS + ACTIVE SHOOTER + ACTIVE STATION

ORDER CODE: SCTINY

» SCMINI-SCOREBOARD

TECHNICAL DATA:

- 6 LINES WITH A 6X25/50 GRID TO DISPLAY SHOOTING PROGRESS AND HITS/LOSTS
- BOARD SIZE: 1700X1200MM
- 100MM DIGIT HEIGHT WITH 7X5 DOT MATRIX RESOLUTION
- FULLY DAYLIGHT CAPABLE
- DIRECTLY CONNECTS TO RANGEMASTER SEQUENCERS
- GOOD FOR ALL TYPES OF ENVIROMENTS/TEMPERATURES/LIGHT CONDITIONS
- PRICE MENTIONED BELOW EXCLUDING STANDS/PYLONS BUT WITH DATA CABLE.
- INPUT VOLTAGE: 80..240 VOLT AC
- TYPICAL POWER CONSUMPTION AT 220VAC: 70 WATTS

ORDER CODE: SCMINI

» SCMINE-SCOREBOARD

TECHNICAL DATA:

- 6 LINES WITH A 6X25/50 GRID TO DISPLAY SHOOTING PROGRESS AND HITS/LOSTS
- BOARD SIZE: 1700X1200MM
- 100MM DIGIT HEIGHT WITH 7X5 DOT MATRIX RESOLUTION
- FULLY DAYLIGHT CAPABLE, BI-CHROMATIC
- DIRECTLY CONNECTS TO RANGEMASTER SEQUENCERS
- GOOD FOR ALL TYPES OF ENVIROMENTS/TEMPERATURES/LIGHT CONDITIONS
- PRICE MENTIONED BELOW EXCLUDING STANDS/PYLONS BUT WITH DATA CABLE.
- INPUT VOLTAGE: 80..240 VOLT AC
- TYPICAL POWER CONSUMPTION AT 220VAC: 65 WATTS

ORDER CODE: SCMINE

» SCMIDI-SCOREBOARD

TECHNICAL DATA:

- 6 LINES BY 8+2 LETTERS/DIGITS + 25/50 SIGNS FOR HITES + LOSTS
- DIMENSION: APPROX. 2200MMX1100MM
- AUTOMATICALLY ADJUSTS TO SHOOTING SCHEMES (I.E. SKEET/ TRAP/ DOUBLE TRAP/ COMPAK)
- 100MM DIGIT HEIGHT WITH 7X5 DOT MATRIX RESOLUTION
- FULLY DAYLIGHT CAPABLE, ULTRA-HIGH-BRIGHTNESS LEDS RED
- DIRECTLY CONNECTS TO RANGEMASTER SEQUENCERS
- GOOD FOR ALL TYPES OF ENVIROMENTS/TEMPERATURES/LIGHT CONDITIONS
- INPUT VOLTAGE: 80..240VAC
- TYPCIAL POWER CONSUMPTION: < 80 WATTS AT 220V

ORDER CODE: SCMIDI

» SCMIDE-SCOREBOARD

TECHNICAL DATA:

- 6 LINES BY 8+2 LETTERS/DIGITS + 25/50 SIGNS FOR HITES + LOSTS
- DIMENSION: APPROX. 2200MMX1100MM
- AUTOMATICALLY ADJUSTS TO SHOOTING SCHEMES (I.E. SKEET/ TRAP/ DOUBLE TRAP/ COMPAK)
- 100MM DIGIT HEIGHT WITH 7X5 DOT MATRIX RESOLUTION
- FULLY DAYLIGHT CAPABLE, ULTRA-HIGH-BRIGHTNESS LEDS RED
- DIRECTLY CONNECTS TO RANGEMASTER SEQUENCERS
- GOOD FOR ALL TYPES OF ENVIROMENTS/TEMPERATURES/LIGHT CONDITIONS
- INPUT VOLTAGE: 80..240VAC
- TYPCIAL POWER CONSUMPTION: < 80 WATTS AT 220V

ORDER CODE: SCMIDE

» SCMEGA-SCOREBOARD

TECHNICAL DATA:

- 8 LINES BY 64 ROWS
- DIMENSION: 5100MMX1600MM
- AUTOMATICALLY ADJUSTS TO SHOOTING SCHEMES (I.E. SKEET / TRAP /DOUBLE TRAP /COMPAK)
- 100MM DIGIT HEIGHT WITH 7X5 DOT MATRIX RESOLUTION
- FULLY DAYLIGHT CAPABLE, ULTRA-HIGH-BRIGHTNESS LEDS RED
- DIRECTLY CONNECTS TO RANGEMASTER SEQUENCERS
- GOOD FOR ALL TYPES OF ENVIROMENTS /TEMPERATURES /LIGHT CONDITIONS
- INPUT VOLTAGE: 80..240VAC
- TYPCIAL POWER CONSUMPTION: 350WATT AT 220V

ORDER CODE: SCMEGA

» SCMEGE-SCOREBOARD

TECHNICAL DATA:

- 8 LINES BY 64 ROWS
- DIMENSION: 5100MMX1600MM
- AUTOMATICALLY ADJUSTS TO SHOOTING SCHEMES (I.E. SKEET /TRAP /DOUBLE TRAP /COMPAK)
- 100MM DIGIT HEIGHT WITH 7X5 DOT MATRIX RESOLUTION
- FULLY DAYLIGHT CAPABLE, ULTRA-HIGH-BRIGHTNESS LEDS GREEN/ REED
- DIRECTLY CONNECTS TO RANGEMASTER SEQUENCERS
- GOOD FOR ALL TYPES OF ENVIROMENTS /TEMPERATURES /LIGHT CONDITIONS
- INPUT VOLTAGE: 80..240VAC
- TYPCIAL POWER CONSUMPTION: 350WATT AT 220V

ORDER CODE: SCMEGE

» 8 CHANNEL DIGITAL TRANSMITTER "ECO-SERIES"

TECHNICAL DATA:

- 8 CHANNEL DIGITAL TRANSMITTER
- DIGITAL ENCRYPTION
- UP TO 500M RANGE WITH RANGEMASTER "IQ" RECEIVERS
- UP TO 150M RANGE WITH "ECO" RECEIVERS
- EXTERNAL ANTENNA (INCLUDED)
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER SUPPLY: 2XCR2032
- 32 TRANSMISSION-ADRESSES SETABLE
- HIGH QUALITY INTERAL PUSH BUTTONS
- PUSH BUTTONS PROTECTED BY REPLACEABLE ADHESIVE

ORDER CODE: TXECO

» 3 CHANNEL DIGITAL TRANSMITTER - PRO SERIES - SKEET LAYOUT

TECHNICAL DATA:

- 3 CHANNEL DIGITAL TRANSMITTER, TYPICAL SKEET LAYOUT
- DIGITAL ENCRYPTION
- UP TO 500M RANGE WITH RANGEMASTER "PRO" SERIES RECEIVERS
- EXTERNAL ANTENNA (INCLUDED)
- EXTENDED TEMPERATURE RANGE: -30°C TO +60°C
- POWER SUPPLY: 1X9V BATTERY (INCLUDED)
- 32 TRANSMISSION-ADRESSES SETABLE
- 3 HIGH QUALITY EXTERNAL PUSH BUTTONS

ORDER CODE: TXPRO3

» 4 CHANNEL DIGITAL TRANSMITTER - PRO SERIES

TECHNICAL DATA:

- 4 CHANNEL DIGITAL TRANSMITTER
- DIGITAL ENCRYPTION
- UP TO 500M RANGE WITH RANGEMASTER "PRO" SERIES RECEIVERS
- EXTERNAL ANTENNA (INCLUDED)
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER SUPPLY: 1X9V BATTERY (INCLUDED)
- 32 ADRESSES SELECTABLE
- 4 HIGH QUALITY EXTERNAL PUSH BUTTONS

ORDER CODE: TXPRO4

» 8 CHANNEL DIGITAL TRANSMITTER - PRO SERIES

TECHNICAL DATA:

- 8 CHANNEL DIGITAL TRANSMITTER
- DIGITAL ENCRYPTION
- UP TO 500M RANGE WITH RANGEMASTER "PRO" SERIES RECEIVERS
- EXTERNAL ANTENNA (INCLUDED)
- WORKING TEMPERATURE: -30°C TO +80°C
- POWER SUPPLY: 1X9V BATTERY (INCLUDED)
- 32 ADRESSES SELECTABLE
- "HIGH QUALITY" EXTERNAL PUSH BUTTONS

ORDER CODE: TXPRO8

» 8 CHANNEL TRANSMITTER "ULTIMATE-SERIE"

TECHNICAL DATA:

- 8 CHANNEL TRANSMITTER
- DIGITAL ENCRYPTION
- UP TO 500M RANGE WITH RANGEMASTER "PRO" SERIES RECEIVERS
- UP TO 150M RANGE WITH "ECO" RECEIVERS
- EXTERNAL ANTENNA (INCLUDED)
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER SUPPLY: 1X9V BATTERY (INCLUDED)
- 32 TRANSMISSION-ADRESSES SETABLE
- HIGH QUALITY STEEL PUSH BUTTONS
- ENGRAVED FRONT PLATE
- EXTRA HEAVY DUTY ALLOY ENCLOSURE

ORDER CODE: TXULT8

» SPORTING COMMANDER + CHIPCARD READER + 4x16 DISPLAY

TECHNICAL DATA:

- 8 CHANNEL DIGITAL TRANSMITTER
- CHIPCARD READER WITH PAYMENT SOLUTION BUILT IN
- 4X16 DIGIT LCD DISPLAY (GREEN/YELLOW OR BLUE)
- DIGITAL ENCRYPTION
- UP TO 500M RANGE WITH RANGEMASTER "PRO" SERIES RECEIVERS
- EXTERNAL ANTENNA (INCLUDED)
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER SUPPLY: 2X9V BATTERY (INCLUDED)
- 2 COUNTERS (RESETABLE) INCLUDED
- FREE MODE INCLUDED
- 32 TRANSMISSION-ADRESSES SETABLE
- KEYS LOCKABLE & RANGEMASTER "RANGE PROTECT" BUILT IN
- FREE MODE WITH SETUP CHIPCARD (INCLUDED)
- HIGH QUALITY EXTERNAL PUSH BUTTONS AND SWITCHES

ORDER CODE: TXSPO8

» 24 CHANNEL TRANSMITTER "IQ-SERIE"

TECHNICAL DATA:

- 24 CHANNEL TRANSMITTER
- DIGITAL ENCRYPTION
- UP TO 250M RANGE WITH RANGEMASTER "PRO" SERIES RECEIVERS
- UP TO 75M RANGE WITH "ECO" RECEIVERS
- INTERNAL ANTENNA
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER SUPPLY: 1X9V BATTERY (INCLUDED)
- 32 TRANSMISSION-ADRESSES SETABLE
- HIGH QUALITY PUSH BUTTONS
- EXTRA HEAVY DUTY ENCLOSURE

ORDER CODE: TX24K

» 1 OUT OF 8 CHANNELS RECEIVER "RX-IQ"

TECHNICAL DATA:

- 1 OUT OF 8 CHANNEL DIGITAL RECEIVER
- DIGITAL ENCRYPTION
- EXTERNAL ANTENNA (WIPE-INCLUDED)
- UP TO 500M RANGE WITH RANGEMASTER TRANSMITTERS
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER (INPUT): 7,5 - 24VDC OR 220VAC
- 32 TRANSMISSION-ADRESSES SETABLE
- HEAVY DUTY RELAIS BUILT IN
- POWER GOOD LED
- SHORT OR LONG PULL OF RELAY SETABLE
- 433MHZ

ORDER CODE: RX-IQ1

» SKEET- RECEIVER "RX-IQ2"

TECHNICAL DATA:

- 3 CHANNEL - 2 RELAIS DIGITAL RECEIVER FOR SKEET
- DIGITAL ENCRYPTION
- EXTERNAL ANTENNA
- UP TO 500M RANGE WITH RANGEMASTER TRANSMITTERS
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER INPUT:
  110-220VAC & 12-18VAC/DC
- 32 TRANSMISSION-ADRESSES SETABLE
- 2 RELAIS (WITH SOCKET)
- POWER GOOD LED
- 433MHZ
- WORKS AS REPLACEMENT FOR 3-PUSH-BUTTON WIRE-RELEASE SYS.

ORDER CODE: RX-IQ2

» SKEET- RECEIVER "RX-IQ4S"

TECHNICAL DATA:

- 3-CHANNEL-4 RELAIS DIGITAL SKEET RECEIVER (HIGH/LOW/DOUB.)
- DIGITAL ENCRYPTION
- EXTERNAL ANTENNA
- UP TO 500M RANGE WITH RANGEMASTER TRANSMITTERS
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER INPUT:
  110-220VAC & 12-18VAC/DC
- 32 TRANSMISSION-ADRESSES SETABLE
- 4 RELAIS (WITH SOCKET)
- POWER GOOD LED
- 433MHZ
- DRIVES 2 SKEET TRAPS, 2 SKEET LIGHTS, TIMER ON/OFF

ORDER CODE: RX-IQ4S

» 4 CHANNEL RECEIVER "RX-IQ4"

TECHNICAL DATA:

- 4 CHANNEL DIGITAL RECEIVER (KEYS A,B,C,D)
- DIGITAL ENCRYPTION
- EXTERNAL ANTENNA
- UP TO 500M RANGE WITH RANGEMASTER TRANSMITTERS
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER INPUT:
  110-220VAC & 12-18VAC/DC
- 32 TRANSMISSION-ADRESSES SETABLE
- 4 RELAIS (WITH SOCKET)
- POWER GOOD LED
- 433MHZ
- SHORT OR LONG PULL OF RELAY SETABLE

ORDER CODE: RX-IQ4

» 8 CHANNEL RECEIVER "RX-IQ8"

TECHNICAL DATA:

- 8 CHANNEL DIGITAL RECEIVER
- DIGITAL ENCRYPTION
- EXTERNAL ANTENNA
- UP TO 500M RANGE WITH RANGEMASTER TRANSMITTERS
- WORKING TEMPERATURE: -30°C TO +60°C
- POWER INPUT:
  110-220VAC & 12-18VAC/DC
- 32 TRANSMISSION-ADRESSES SETABLE
- 8 RELAIS (WITH SOCKET)
- POWER GOOD LED
- 433MHZ
- SHORT OR LONG PULL OF RELAY SETABLE

ORDER CODE: RX-IQ8

» 24 CHANNEL RECEIVER FOR RANGEMASTER X3 PRO/.NET EVO

TECHNICAL DATA:

- 24-CHANNEL RECEIVER
- FULLY DIGITAL ENCODING
- EXTERNAL ANTENNA
- UP TO 150M RANGE WITH RANGEMASTER 24K TRANSMITTERS
- EXTENDED TEMPERATURE RANGE: -30°C TO +60°C
- POWER SUPPLY VIA USB-INTERFACE
- 32 POSSIBLE TRANSMISSION ADRESSES
- USB-INTERFACE
- INDICATORS: POWER GOOD, ALIVE, RX
- 433MHZ

ORDER CODE: RX24K

» RELEASE BOX FOR SKEET

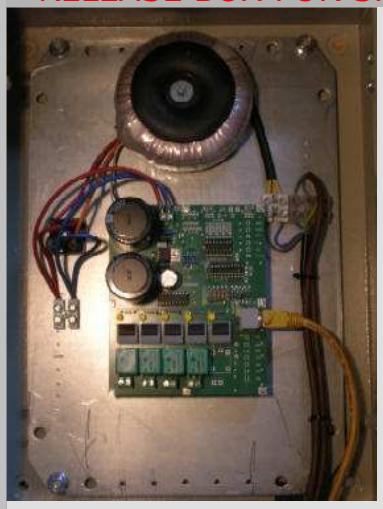

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 2 TRAPS AND 2 LIGHTS
- HEAVY DUTY / RIGID DESIGN
- 4 EXTRA HEAVY DUTY RELAYS
- 4 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- 4 STATUS LEDS FOR RELAY STATUS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. MATARELLI TRAPS)
- SUPPLYS EITHER 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- LESS THAN 5MS SWITCHING TIME OF RELAYS
- GOOD FOR ALL TYPE OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL01

» RELEASE BOX FOR 5 Traps

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 5 TRAPS
- HEAVY DUTY / RIGID DESIGN
- 5 EXTRA HEAVY DUTY RELAYS
- 5 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- 5 LEDS FOR RELAY STATUS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. MATARELLI TRAPS)
- SUPPLYS EITHER 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- LESS THAN 5MS SWITCHING TIME OF RELAYS
- GOOD FOR ALL TYPES OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL02

» RELEASE BOX FOR 15 TRAPS "RL-03"

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 15 TRAPS
- HEAVY DUTY / RIGID DESIGN
- 15 EXTRA HEAVY DUTY RELAYS
- 15 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- 15 STATUS LEDS FOR RELAY STATUS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. MATARELLI TRAPS)
- SUPPLYS EITHER 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- LESS THAN 5MS SWITCHING TIME OF RELAYS
- GOOD FOR ALL TYPE OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL03

» RELEASE BOX FOR 15 Traps "RL-04"

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 15 TRAPS
- HEAVY DUTY / RIGID DESIGN
- 15 EXTRA HEAVY DUTY ELECTRONIC (MOSFET) RELAYS
- 15 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. FOR MATARELLI TRAPS)
- SUPPLYS 24VOLT SOLENOID VOLTAGE
- VIRTUALLY NO SWITCHING TIME (< 50YSEC)
- IP66 METAL ENCLOSURE

ORDER CODE: RL04

» RELEASE BOX FOR 17 TRAPS + 2 LIGHTS (COMBINED RANGES)

TECHNICAL DATA:
- COMBINED RELEASE BOX/FEEDING UNIT FOR 15 +2 TRAPS AND 2 LIGHTS (OPTIMIZED DESIGN FOR COMBINED TRAP/SKEET RANGES)
- HEAVY DUTY / RIGID DESIGN
- 19 EXTRA HEAVY DUTY RELAYS
- 19 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. FOR MATARELLI TRAPS)
- SUPPLYS 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- VIRTUALLY NO SWITCHING TIME (< 5MSEC)
- GOOD FOR ALL TYPES OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL06

» RELEASE BOX FOR SKEET

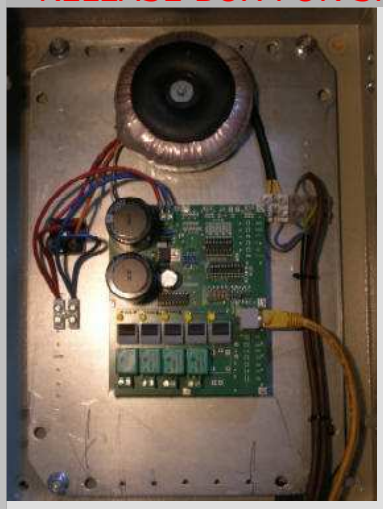

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 2 TRAPS AND 2 LIGHTS
- HEAVY DUTY / RIGID DESIGN
- 4 EXTRA HEAVY DUTY RELAYS
- 4 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- 4 STATUS LEDS FOR RELAY STATUS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. MATARELLI TRAPS)
- SUPPLYS EITHER 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- LESS THAN 5MS SWITCHING TIME OF RELAYS
- GOOD FOR ALL TYPE OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL01

» RELEASE BOX FOR 5 Traps

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 5 TRAPS
- HEAVY DUTY / RIGID DESIGN
- 5 EXTRA HEAVY DUTY RELAYS
- 5 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- 5 LEDS FOR RELAY STATUS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. MATARELLI TRAPS)
- SUPPLYS EITHER 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- LESS THAN 5MS SWITCHING TIME OF RELAYS
- GOOD FOR ALL TYPES OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL02

» RELEASE BOX FOR 15 TRAPS "RL-03"

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 15 TRAPS
- HEAVY DUTY / RIGID DESIGN
- 15 EXTRA HEAVY DUTY RELAYS
- 15 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- 15 STATUS LEDS FOR RELAY STATUS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. MATARELLI TRAPS)
- SUPPLYS EITHER 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- LESS THAN 5MS SWITCHING TIME OF RELAYS
- GOOD FOR ALL TYPE OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL03

» RELEASE BOX FOR 15 Traps "RL-04"

TECHNICAL DATA:
- RELEASE BOX/FEEDING UNIT FOR 15 TRAPS
- HEAVY DUTY / RIGID DESIGN
- 15 EXTRA HEAVY DUTY ELECTRONIC (MOSFET) RELAYS
- 15 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. FOR MATARELLI TRAPS)
- SUPPLYS 24VOLT SOLENOID VOLTAGE
- VIRTUALLY NO SWITCHING TIME (< 50YSEC)
- IP66 METAL ENCLOSURE

ORDER CODE: RL04

» RELEASE BOX FOR 17 TRAPS + 2 LIGHTS (COMBINED RANGES)

TECHNICAL DATA:
- COMBINED RELEASE BOX/FEEDING UNIT FOR 15 +2 TRAPS AND 2 LIGHTS (OPTIMIZED DESIGN FOR COMBINED TRAP/SKEET RANGES)
- HEAVY DUTY / RIGID DESIGN
- 19 EXTRA HEAVY DUTY RELAYS
- 19 PUSH BUTTONS FOR TESTING/DISARMING OF TRAPS
- STRONG TRANSFORMER WITH 200VA
- OPTIMIZED AS DIRECT SOLENOID DRIVER (I.E. FOR MATARELLI TRAPS)
- SUPPLYS 24VOLT SOLENOID VOLTAGE OR SWITCHES EXTERNAL POWER SUPPLY
- EASY INSTALLATION WITH RANGEMASTER CABLE SETS (PUSH IN CONNECTORS)
- OUTSIDE ON/OFF SWITCH
- OUTSIDE BI-METAL FUSE
- OUTSIDE "POWER GOOD" INDICATOR
- VIRTUALLY NO SWITCHING TIME (< 5MSEC)
- GOOD FOR ALL TYPES OF (SEMI-)AUTOMATIC TRAPS
- IP66 METAL ENCLOSURE

ORDER CODE: RL06

» HIGHLY SENSITIE MICROPHONE, WITHOUT LIGHT/LAMP, 1,5M CABLE

TECHNICAL DATA:

- HIGHLY SENSITIVE MICROPHONE
- OPTIMIZED DESIGN FOR CLAY TARGET SHOOTING
- COMPLETLY ASSEMBLED WITH BRACKET

ORDER CODE: MIC00

» MICROPHONE WITH LIGHT, CABLE, PEDESTRIAL, CONNECTORS

TECHNICAL DATA:

- HIGHLY SENSITIVE MICROPHONE
- OPTIMIZED DESIGN FOR CLAY TARGET SHOOTING
- ULTRA BRIGHT LED
- COMPLETLY ASSEMBLED WITH CABLE (1,5M) ATTACHED
- INCLUDED ALSO: CONNECTOR (MALE + FEMALE)
- INCLUDES EXTRA HEAVY DUTY STAND MIC03 (DEPENDING TO AVAILABILITY, APPEARAL OF STAND MAY DIFFER TO THE MODEL SHOWN ON THIS PICTURE)

ORDER CODE: MIC01

» MICROPHONE WITH LIGHT, BRACKETS, CABLE, CONNECTORS

TECHNICAL DATA:

- HIGHLY SENSITIVE MICROPHONE
- OPTIMIZED DESIGN FOR CLAY TARGET SHOOTING
- ULTRA BRIGHT LED
- COMPLETLY ASSEMBLED WITH CABLE (1,5M) ATTACHED
- INCLUDED ALSO: CONNECTOR (MALE + FEMALE)

ORDER CODE: MIC02

» EXTRA HEAVY DUTY STAND FOR MICROPHONE MIC02

TECHNICAL DATA:

- EXTRA HEAVY DUTY STAND
- IRON TRIPOD WITH EXCELLENT STABILITY
- COATED ALLOY TUBE
- HIGHLY RESISITVE AGAINST WATER
- VERY STABLE - EVEN UNDER STRONG WINDS
- VERY HEAVY
- MICROPHONE NOT INCLUDED!

ORDER CODE: MIC03

» EXTRA HEAVY DUTY MICROPHONE STAND

TECHNICAL DATA:

- EXTRA HEAVY DUTY STAND
- FOR FIXED INSTALLATION
- ALLOY FRAME
- WITH 2 (PUSH-IN) RUBBER COVERS FOR REMOVALE MICROPHONE
- MICROPHONE NOT INCLUDED!

ORDER CODE: MIC03

» CHIPCARD TERMINAL

TECHNICAL DATA:

- 15/25 CLAYS SELECTABLE PER CARD INSERTION
- 4X16 LCD-DISPLAY
- RESETABLE COUNTERS
- AUTO-SAVE + RESTORE ON POWER FAILURE
- ADJUSTABLE AMOUNT OF NO-BIRDS
- HIGH QUALITY DESIGN
- EXTERNAL POWER SUPPLY (110-220V AC-12VDC CONVERTER)
- VERY SIMPLE INSTALLATION

ORDER CODE: CCDE

» CHIPCARD PAYMENT SYSTEM AND INTERFACE BOX (UP TO 8 TRAPS)

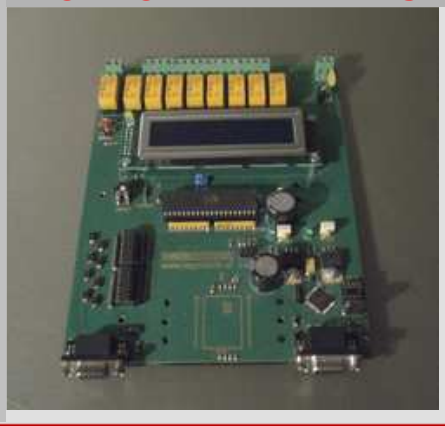

TECHNICAL DATA:

- 2X16 LINES DISPLAY
- CHIPCARD READER
- AUTO CONTINUE UPON DATA LOSS
- NEEDS EXTERNAL POWER SUPLY (7,5-24V DC)
- ADJUSTABLE NUMBER OF NO BIRDS PER CARD INSERTION

ORDER CODE: ELITEPS

» ELECTRIC COINER

TECHNICAL DATA:

- RIGID DESIGN
- INCLUDES 1,5 M CABLE AND CONNECTOR
- INCLUDES 100 COINS

ORDER CODE: COINA

» ELECTRONIC COINER WITH ADJUSTABLE TARGETS PER COIN/TOKEN

TECHNICAL DATA:

- INCLUDES 2X16 DIGITS LCD DISPLAY
- INCLUDES INTERENAL 220V POWER SUPPLY
- HIGH QUALITY DESIGN
- SWITCHES RELAY AS LONG CREDIT IS DISPLAYED
- INCLUDES 100 COINS
- CREDIT/TARGETS ADUJUSTABLE PER COIN/TOKEN INSERTED
- INCLUDES INPUT FOR EXTERNAL TRIGGER

ORDER CODE: COINE

» CHIPCARD READER, STAND ALONE, TIME BASED FOR RIFLE RANGES

TECHNICAL DATA:

- INCLUDES 2X16 DIGITS LCD DISPLAY
- INCLUDES EXTERNAL POWER SUPPLY
- CHECKS FOR VALID (USING "RANGEMASTER RANGE PROTECT") CHIPCARD AND SWITCHES AN INTERNAL RELAY AS LONG AS CREDIT IS ON CHIPCARD
- HIGH QUALITY DESIGN
- DECREASES CREDIT ON CHIPCARD AFTER EVERY 60 SECONDS

ORDER CODE: CCR03

» CHIPCARD READER, TIME BASED (RIFLE R.) + INTERFACE X3 PRO/.NET

TECHNICAL DATA:

- INCLUDES 2X16 DIGITS LCD DISPLAY
- INCLUDES EXTERNAL POWER SUPPLY
- HIGH QUALITY DESIGN
- WITH INTERFACE FOR X3 PRO/.NET
- REDUCES SERVER BASED CREDIT IN CONNECTION WITH CCCM
- 1X CCCM NECESSARY PER 32 RANGES

ORDER CODE: CCR01

» DOSA-DOOR OPENER FOR CHIPCARDS - STAND ALONE PRODUCT

TECHNICAL DATA:

- DOOR OPENER (1 RELAIS BUILT IN), STAND ALONE
- INCLUDES 2X16 DIGITS LCD DISPLAY WITH BACKLIGHT
- CHECKS FOR VALID CHIPCARDS INSERTED ('RANGE PROTECT')
- NEEDS EXTERNAL POWER SUPLY (7,5-24V DC)
- COMES WITHOUT POWER SUPPLY

ORDER CODE: DOSA

» DOOR CHIPCARD OPENER +PROTOCOL SOFTWARE, LOG, INTERFACE

TECHNICAL DATA:

- DOOR OPENER (1 RELAIS BUILT IN)
- INCLUDES 2X16 DIGITS LCD DISPLAY WITH BACKLIGHT
- CHECKS FOR VALID CHIPCARDS INSERTED
- NEEDS EXTERNAL POWER SUPLY (7,5-24V DC)
- RS485 AND RS 232 INTERFACE BUILT IN
- LOG SHOWS ALL ACTIVITIES/ACCESS

ORDER CODE: DOSR

» CHIPCARDS FOR ID PURPOSES

TECHNICAL DATA:

- CHIPCARDS IN 100 PCS UNITS FOR ID PURPOSES ONLY
- WHITE/WHITE
- 4C FRONTSIDE COLOUR PRINT ON REQUEST
- 4C BACKSIDE COLOUR PRINT ON REQUEST
- 4C/4C COLOUR PRINT ON REQUEST

ORDER CODE: CC

» SECURE CHIPCARDS WITH CLONE PROTECTION

TECHNICAL DATA:

- CHIPCARDS IN 100 PCS UNITS
- WHITE/WHITE
- 4C FRONTSIDE COLOUR PRINT ON REQUEST
- 4C BACKSIDE COLOUR PRINT ON REQUEST
- 4C/4C COLOUR PRINT ON REQUEST

ORDER CODE: CC_SEC

» CHIPCARD LOADING SOFTWARE AND CHIPCARD READER

TECHNICAL DATA:

- PREPARES CHIPCARDS WITH RANGEMASTER "RANGE PROTECT"
- INCLUDES CHIPCARD READER
- INCLUDES SOFTWARE FOR WINDOWS XP-WINDOWS 8
- DRIVERS
- USB-CABLE
- SOFTWARE IN ENGLISH
- USB STICK AND MANUAL IN PDF FORMAT

ORDER CODE: CCS

» AUTOMATIC CHIPCARD LOADER + TOUCH SCREEN + MONEY ACCEPTOR + PRINTER

TECHNICAL DATA:

- INCLUDES COMPUTER, TOUCH-SCREEN, CHIPCARD READER AND PRINTER
- ACCEPTS ALL EURO NOTES (5-100), OTHER CURRENCIES ON REQUEST.
- SHOWS BALANCE, PRINTS INDIVIDUAL SHOOTER`S ACCOUNT SHEETS
- PRINT TRAINING RESULTS WITH TIMING

ORDER CODE: CCL

» CHIPCARD LOADER

TECHNICAL DATA:

- PREPARES CHIPCARDS WITH RANGEMASTER "RANGE PROTECT"
- INCLUDES 4X16 DIGITS LCD DISPLAY
- INCLUDES 2X9V ALKALI-BATTERY
- HANDHELD TERMINAL
- HIGH QUALITY EXTERNAL PUSH BUTTONS
- RIGID/DURABLE DESIGN

ORDER CODE: CCC

» EASYSCORE

DESCRIPTION:

- EASY & PROFESSIONAL ADMINISTRATION OF CLAY SHOOTING COMPETITIONS
- FULL COMPLIANCE WITH ISSF & FITASC REGULATIONS
- AUTOMATED DRAWING OF LOTS AND SQUADING
- ACOUNTING FOR COMPETITIONS INCLUDED
- EASY CREATION OF TIMETABLES & SCORESHEETS
- PROFESSIONAL REPORTS & RESULT LISTS -> DOWNLOAD FOLDER OF SAMPLE PRINTS
- HTML-EXPORT OF INDIVIDUAL- & TEAM RESULTS
- AUTOMATED RESQUADING FOR COMPAK/SPORTING COMPETITIONS
- STATISTICAL REPORTINGS
- USER INTERFACE AND PRINTS/REPORTS COMPLETELY IN ENGLISH

» EASYSCORE./NET

DESCRIPTION:

- EASY & PROFESSIONAL ADMINISTRATION OF CLAY SHOOTING COMPETITIONS
- FULL COMPLIANCE WITH ISSF & FITASC REGULATIONS
- AUTOMATED DRAWING OF LOTS AND SQUADING
- ACOUNTING FOR COMPETITIONS INCLUDED
- EASY CREATION OF TIMETABLES & SCORESHEETS
- PROFESSIONAL REPORTS & RESULT LISTS -> DOWNLOAD FOLDER OF SAMPLE PRINTS
- HTML-EXPORT OF INDIVIDUAL- & TEAM RESULTS
- AUTOMATED RESQUADING FOR COMPAK/SPORTING COMPETITIONS
- STATISTICAL REPORTINGS
- MULTI-USER-SOFTWARE
- LIVE-RANKING ON COMPUTER SCREENS OR BEAMERS WITH RANGEVIEW-SOFTWARE

» RANGEMASTER "X3 PRO/.NET"

DESCRIPTION:

- COMPLETE SHOOTER`S DATABASE
- COMPLETE DYNAMIC PRICING SOLUTION
- CHIPCARD PAYMENT WITH ACCOUNTING FOR EACH SHOOTER
- INTEGRATED / ADVANCED COMPETITION SOFTWARE WITH ALL NECESSARY FEATURES
- FULL ACCOUNTING FOR THE SHOOTING RANGE WITH ALL NECESSARY REPORTING FEATURES
- MOST ADVANCED SEQUENCERS (X3FLASH) WITH MOST MODERN SYSTEM FEATURES
- REAL TIME INTERNET COMPETITION SUPPORT
- REAL TIME SHOOTER/SPECTATOR MONITORS AND LARGE - IN FIELD SCOREBOARDS
- REAL TIME SCORING FOR CURRENT ROUNDS IN FIELD AND IN CLUB HOUSES AND ON INTERNET
- REAL TIME RESULT LISTS FOR INDIVIDUALS AND TEAMS
- ACCESS CONTROL WITH CHIPCARD TO RESTRICTED AREAS/RIFLE RANGES OR DOOR OPENERS
- COMPLETE TRAP CHARGE CONTROL WITH COUNTERS / NO BIRD COUNTERS AND CURRENT FILL STATUS
- ONE CHIPCARD PER SHOOTER, CREDIT AVAILABLE FOR ANY TYPE OF CLAY TARGET OR RIFLE SHOOTING
- CHIPCARD LOSS PROTECTION
- ADVANCED TRAINING SYSTEM WITH TIMETAKING/FULL STATISTICAL OUTPUT/FREE TRAINING/D-MINING
- STATUS OF SHOOTING RANGE ALWAYS ONLINE
- MINIMUM STAFF NECESSARY FOR LARGE SHOOTING RANGES
- POSSIBLE PAYMENT MODES (SELECTABLE FOR EACH SHOOTER): PRE-, POST- & FREE OF CHARGE
- MULTI LANGUAGE SUPPORT FOR SHOOTERS INTERFACE:GER/ENG/ITA/ESP/POR/CZ/HU/RUS
- ANY TYPE OF CLAY TARGET SHOOTING INCLUDING HELICES SUPPORTED
- RANGE INTERCOMM / VOIP-TELEPHONY FROM OFFICE TO SHOOTING RANGES

» YCP- PISTOL LANE MOTOR CONTROL

TECHNICAL DATA:

- 1 OUT OF 8 CHANNEL DIGITAL RECEIVER
- MOTOR CONTROL UNIT WITH EMERGENCY BUTTON
- INCLUDES TOUCHLESS MOTION CONTROL SENSOR
- INCLUDES TOUCHLESS 0M SWITCH
- PROGRAMMABLE DISTANCES
- HIGH QUALITY EXTERNAL PUSH BUTTONS
- RIGID/DURABLE

ORDER CODE: YCP

» YCR- RIFLE LANE MOTOR CONTROL

TECHNICAL DATA:

- MOTOR CONTROL UNIT WITH EMERGENCY BUTTON
- INCLUDES TOUCHLESS MOTION CONTROL SENSOR
- INCLUDES TOUCHLESS 0M SWITCH
- PROGRAMMABLE DISTANCES
- HIGH QUALITY EXTERNAL PUSH BUTTONS
- RIGID/DURABLE DESIGN

ORDER CODE: YCR

» DOSA-DOOR OPENER FOR CHIPCARDS - STAND ALONE PRODUCT

TECHNICAL DATA:

- DOOR OPENER (1 RELAIS BUILT IN), STAND ALONE
- INCLUDES 2X16 DIGITS LCD DISPLAY WITH BACKLIGHT
- CHECKS FOR VALID CHIPCARDS INSERTED ('RANGE PROTECT')
- NEEDS EXTERNAL POWER SUPLY (7,5-24V DC)
- COMES WITHOUT POWER SUPPLY

ORDER CODE: DOSA

» CHIPCARD LOADER

TECHNICAL DATA:

- PREPARES CHIPCARDS WITH RANGEMASTER "RANGE PROTECT"
- INCLUDES 4X16 DIGITS LCD DISPLAY
- INCLUDES 2X9V ALKALI-BATTERY
- HANDHELD TERMINAL
- HIGH QUALITY EXTERNAL PUSH BUTTONS
- RIGID/DURABLE DESIGN

ORDER CODE: CCC

» CHIPCARD READER, TIME BASED (RIFLE R.) + INTERFACE X3 PRO/.NET

TECHNICAL DATA:

- INCLUDES 2X16 DIGITS LCD DISPLAY
- INCLUDES EXTERNAL POWER SUPPLY
- HIGH QUALITY DESIGN
- WITH INTERFACE FOR X3 PRO/.NET
- REDUCES SERVER BASED CREDIT IN CONNECTION WITH CCCM
- 1X CCCM NECESSARY PER 32 RANGES

ORDER CODE: CCR01

» CHIPCARD READER, STAND ALONE, TIME BASED FOR RIFLE RANGES

TECHNICAL DATA:

- INCLUDES 2X16 DIGITS LCD DISPLAY
- INCLUDES EXTERNAL POWER SUPPLY
- CHECKS FOR VALID (USING "RANGEMASTER RANGE PROTECT") CHIPCARD AND SWITCHES AN INTERNAL RELAY AS LONG AS CREDIT IS ON CHIPCARD
- HIGH QUALITY DESIGN
- DECREASES CREDIT ON CHIPCARD AFTER EVERY 60 SECONDS

ORDER CODE: CCR03

» DOOR CHIPCARD OPENER +PROTOCOL SOFTWARE, LOG, INTERFACE

TECHNICAL DATA:

- DOOR OPENER (1 RELAIS BUILT IN)
- INCLUDES 2X16 DIGITS LCD DISPLAY WITH BACKLIGHT
- CHECKS FOR VALID CHIPCARDS INSERTED
- NEEDS EXTERNAL POWER SUPLY (7,5-24V DC)
- RS485 AND RS 232 INTERFACE BUILT IN
- LOG SHOWS ALL ACTIVITIES/ACCESS

ORDER CODE: DORS

» RANGEMASTER "X3 PRO/.NET" RIFLE

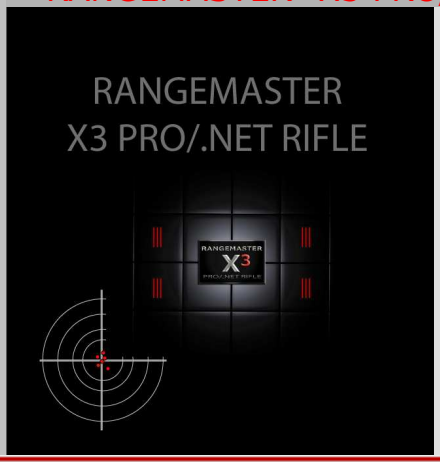

PLEASE DOWNLOAD OUR FOLDER FROM WEBSITE:

www.rangemaster.at

ORDER CODE: X3R